



Estimation of Crop Evapotranspiration of Waterleaf (*Talinumtriangulare Jacq*) Using Lysimeter and Predicted Models

Bunu, M¹., Abdulrahman Sadiya Halima²., and Abdul-Qadir Dauda Aliyu³

¹Department of Agricultural Engineering Technology, School of Engineering
Ramat Polytechnic Maiduguri P.M.B 1070, Borno State, Nigeria. Email
: bunukaleri@gmail.com

^{2&3}Department of Research and Technical Services, Hydraulics Division, National Water
Institute Mando Road. P.M.B 2309, Kaduna, Nigeria. ² Email
: Sadiyabdulrahma@gmail.com, ³Email : abdoolable@gmail.com

Abstract: The knowledge of crop evapotranspiration (ET_c), the combined process of evaporation and plant transpiration, is important in agriculture for scheduling farm operations and designing and managing irrigation and drainage systems. Development of crop coefficient (K_c) can enhance crop evapotranspiration (ET_c) estimates in specific crop growth stages. However, locally determined K_c information is not available for many important crops in Nigeria. This research was, therefore, conducted to determine the growth parameter stage, specific K_c and crop water use for waterleaf at the Ramat Polytechnic Agricultural Research Farm which is located in a semi-arid climatic zone in Maiduguri. Drainage type lysimeter was used to measure crop water use under water balance system and local weather data were used to determine the reference evapotranspiration (ET_o). A lysimeter was used to measure the daily evapotranspiration of waterleaf on a sandy loam soil. Crop coefficient was developed from measured ET_c and ET_o calculated using weather data. Crop evapotranspiration observed from the field using the lysimeter and those estimated using models were compared using Nash- Sutcliffe efficiency (NSE). The outcome of the experiment revealed that, correlation analysis among the growth parameters showed that, there is strong positive relationship of about (82% to 90%). Similarly, crop evapotranspiration values of waterleaf in Maiduguri semi-arid region was found to be averagely 3.65, 4.88, 5.48 and 5.34 mm at each growth stages, respectively, with seasonal total ET_c of 177.44 mm. The crop coefficient values of waterleaf were found to be 0.62, 0.82, 0.86 and 0.76 at each growth stages respectively. The values of ET_c determined from the lysimeter were validated by Blaney-Morin Nigeria (BMN), Blaney-Criddle (BC) and Hargreaves models and better agreement was recorded between the ET_c calculate from empirical model for the waterleaf using Nash- Sutcliffe efficiency (NSE) and T-test software. Therefore, the study revealed that, drainage lysimeter can be said to be functional and efficient to use in the region.

Key words: Waterleaf; Evapotranspiration; Lysimeter; and Crop Coefficient

1.0 INTRODUCTION

1.1 Background of the Study

Irrigation plays an important role in food production globally. Irrigation is the supply of water to crops by artificial means, designed to permit farming in arid region and to offset the effect of drought in semi-arid region and even in areas where total seasonal rainfall is adequate or average (Vaughan *et al.*, 2007). Accurate evapotranspiration estimates are essential to identify the time variations on irrigation needs, to improve the allocation of water resources, and to evaluate the effect of the use of the land and changes in the management of the water balance (Ortega – Farias *et al.*, 2009). Evapotranspiration can be obtained by direct or estimate measures of climatic elements, using empirical methods. The direct method is represented by several types of lysimeters, being the most accurate method, and considered standard – tool for the determination of evapotranspiration (Bernardo *et al.*, 2006; Amorim, 1998). There are several empirical methods in literature that use meteorological elements data to estimate the evapotranspiration. These methods are based on observations and statistical analysis, and are generally adequate for a specific climatic or region condition (Gravilan *et al.*, 2006). Vegetables contain 80 to 95 percent water, because they contain so much water, their yield and quality suffers very quickly from drought. When vegetables are sold, a “sack of water” with a small amount of flavoring and some vitamins is being sold. Thus, for good yields and high quality, irrigation is essential to the production of most vegetables. Most vegetables are rather shallow rooted and even short periods of two to three days of stress can hurt marketable yield. Waterleaf (*Talinum triangulare Jacq.*) is a plant to the family Taliniaceae and commonly found in humid tropics. It has been recognized in many countries of Africa; it is claimed to have South American origin but an African origin may not be doubted (Schippers, 2000). Waterleaf is an erect glabrous perennial herb (80-100cm tall), usually strongly branched; roots are swollen and fleshy. The leaves are alternate, simple, almost sessile and succulent (Oluwole *et al.*, 2018) Waterleaf cultivation like other leafy vegetables cultivation in home gardens improves nutritional quality for the family and may provide additional income for female farmers. As a result of its high nutritional value that provide good source of crude protein (22.1%), and vitamins, waterleaf is playing a major role in efforts to eradicate malnutrition in Africa (Tata *et al.*, 2016). Evapotranspiration (ET) It is the combination of two separate processes through which, water is lost from the soil surface via evaporation process and from the crop by transpiration. (Allen, 1998). Similarly, Konukcu (2007) classified evapotranspiration as actual evapotranspiration E_{Ta} , Crop evapotranspiration E_{Tc} , reference evapotranspiration E_{To} or potential evapotranspiration E_{Tp} . Crop Evapotranspiration is the evapotranspiration from disease-free, well-fertilized crops, grown in large fields, under optimum soil water conditions and achieving full production potential under the given climatic conditions. Crop coefficient (K_c) is defined as the ratio of the crop evapotranspiration to the reference evapotranspiration and can be calculated by different methods (e.g. single crop coefficient method and dual crop coefficient method) (Jensen *et al.*, 1990; Allen *et al.*, 1998). Crop coefficient K_c is the ratio of potential evapotranspiration for a given crop to the evapotranspiration of a reference crop. It represents an integration of effects of four primary characteristics that adjusts the crop from reference grass (i) Crop height, (ii) Albedo, (iii) Canopy resistance, (iv) Evaporation from soil; especially exposed soil. The factors determining the crop coefficients are crop type, climate, soil moisture evaporation, crop growth stage (Vaughan *et al.*, 2007).

Therefore, the current study is undertaken to determine the growth parameters, crop evapotranspiration (ET_c) and crop coefficient (K_c) of waterleaf using drainage in semi-arid region of Maiduguri North-Eastern Nigeria.

2.0 MATERIALS AND METHOD

2.1 Experimental Site

Field experiment was conducted at the Teaching and Research Farm, of the Ramat Polytechnic, Maiduguri, in the Sudano-Sahelian region of northern Nigeria. The site lies between latitude 11°05' N and longitude 13°09' E (Kyari *et al.*, 2014).

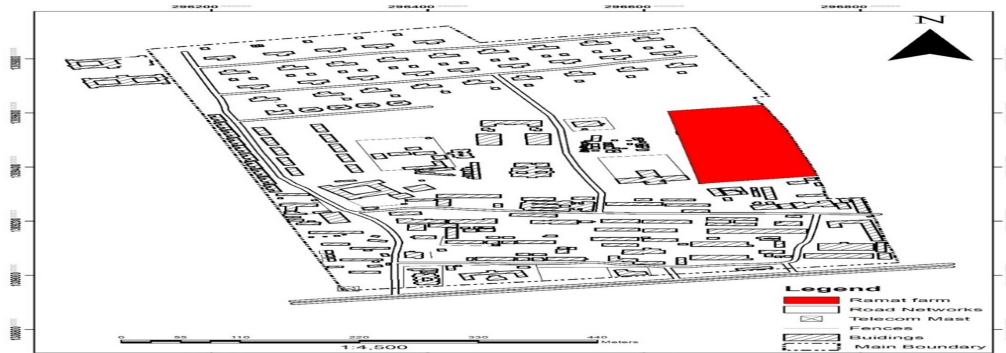


Figure 1: Digitize Map of the Study Area.

Table 1: Mean Soil Characteristics of the Experimental Site (0-30 cm)

Soil type (USDA soil classification)	Sand loamy
Clay (%)	8.0
Silt (%)	11.8
Sand (%)	80.2
p _H	6.8
Field capacity (vol. %)	16.2
Wilting point (vol. %)	3.2
Available water content (vol. %)	13.0
Bulk Density (g/cm ³)	1.70
Organic matter (%)	3.99

Source : Agricultural Research Farm Rampoly

3.2 Agronomic practices

The location for excavation was marked after clearing the site from its previous vegetation in preparation for installation of the non -weighing lysimeter. To effect installation, the soil was excavated in layers, with soil from each layer placed in a separate pile. When the proper depth was reached; the bottom of the hole was leveled. The surface area of the excavation – 3.58m² by 1.6m deep was done manually. This was done to provide some space to allow for the installation of the lysimeter manually. The field layout for the experiment consists of the developed lysimeter planted up with waterleaf stands transplanted from the nursery. The vegetable under study was transplanted on a spacing of 20cm by 15cm. The lysimeter installation was accomplished by six people with the use of shovels, and a few hand tools. The tank was lowered into and centered in the hole upon a stable concrete foundation. The tank was checked to ensure that it sat level on the bottom

of the hole. Soil was backfilled around the outer tank to stabilize the tank as can be seen in figure 3.2. In other words, the outside lysimeter was first filled with soil to provide a firm support to the lysimeter. In other to prevent transport of materials from the soil into the drain pipe, a wire mesh of about 0.20mm was placed at the bottom of the lysimeter, upon the hole drilled, to act as a filtering mechanism. The formation of the filter was achieved first by placing a screen over the hole, then gravel and finally sand. Then the inner tank was backfilled with soil, restoring the soil to the depth from which it was excavated. The soil was packed periodically in an attempt to return it to its original bulk density. In the installation, a freeboard of about 10cm from the ground surface was allowed and the process of irrigation was carried out with its attendant drainage. But before the transplanting, the lysimeter has stopped draining from the drainage pipe after saturation and the initial soil moisture data taken. The receiving vessel being a discarded plastic 20-litre emulsion paint container was placed in an adjacent pit for the collection of the percolated water. The field layout for the experiment consists of the developed lysimeter planted up with waterleaf stands transplanted from the nursery. The vegetable under study was transplanted on a spacing of 20cm by 15cm. weeding was done almost on daily basis during the course of this study, this is because weeds do not only compete with the crops for space and nutrients but also, transpire at a rate which affect, negatively the result of the evapotranspiration studies. Farm yard manure (Poultry) was applied to the Research lysimeter at 500g, the first dosage of fertilizer was applied after the first week of transplanting at a depth of 5-8cm, while the second dosage was also applied four weeks after planting.



Plate 1: Installation of a Lysimeter



Plate 2: lysimeter showing Waterleaf Crop

3.0 RESULTS AND DISCUSSION

Table 1 shows the correlation results as among the growth parameter in the study area. The parameters considered were number of leaves per plant, stem diameter, plant height, longest leaf length and longest leaf width of the waterleaf crop experimented using lysimeter was analyzed at ($p < 0.05$).

Table 1: Correlation coefficients among growth parameter of waterleaf

WL	NLPP	SD	PH	LLL	LLW
NLPP	1				
SD	0.8386**	1			
PH	0.6639*	0.8120**	1		
LLL	0.3811*	0.8228**	0.9997**	1	
LLW	0.4161	0.7814*	0.9986**	0.9975*	1

NLPP= Number of leaf per plant, SD=Stem diameter, PH= plant height, LLL= Longest leaf length, LLW= Longest leaf width, WL = Waterleaf **=highly significant and *=significant.

As shown in Table 1 number of leave per plant showed a significant positive association with stem diameter (0.8386**), followed by plant height (0.6639**), and the longest leaf length and longest leaf width exhibited not significant association of (0.3811 and 0.4161) respectively. Correspondingly, the stem diameter, showed a highly significant positive association with plant height, longest leaf length and longest leaf with corresponding values (0.8120**, 0.8228**and 0.7814**) respectively. Conversely, plant height exhibited extremely significant positive association values of (0.9907** and 0.9986) with longest leaf length and longest leaf respectively. Likewise, positive significant association (0.9975**) was observed between longest leaf length and longest leaf width. The results are in line with the finding (Egharevba 1999).

3.2 Estimated stage -wise crop coefficients (Kc) of the waterleaf crops at different stages of growth

Table 2 shows the estimated crop coefficients of waterleaf at different stages of growth in the experiment farm were presented in an internationally recognized growth stages

Table 2: Estimated stage -wise crop coefficient (Kc) of the waterleaf

Day after Planting	ETc lysimeter (mm/day)	ETo reference (mm/day)	Kc (-)
Initial 1-7DAP	3.65	5.9	0.62
Dev 8-17DAP	4.88	5.95	0.82
Mid 18-29DAP	5.46	6.36	0.86
Late 30-36DAP	5.34	6.99	0.76

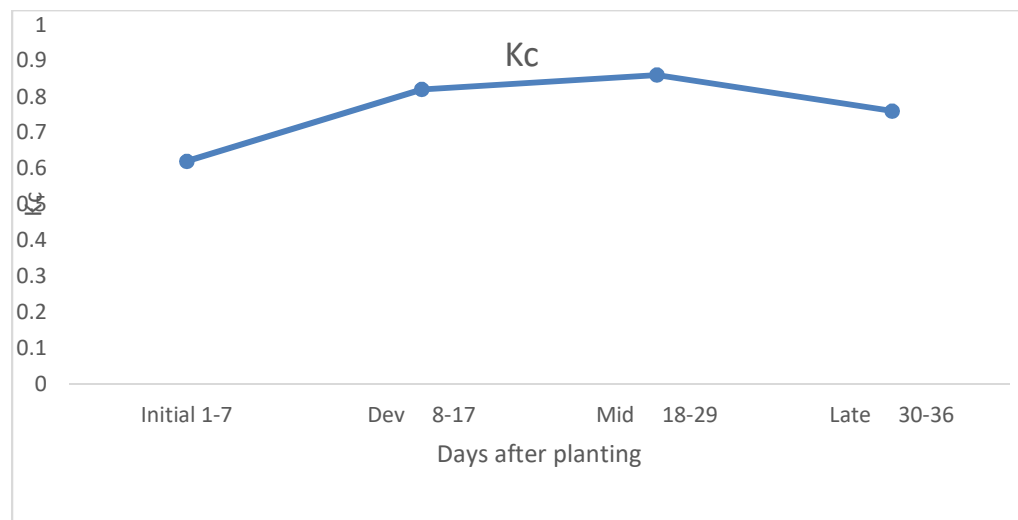


Figure2: Plot of stage -wise crop coefficient (Kc)

The curve presented in Figure 4 represents the changes in the Kc of waterleaf crop over the length of the growing season. The shape of the curve represents the changes in the vegetation and ground cover during plant development and maturation that affect the ratio of ETc to ETo. The Kc increased from the initial to development stages while reached its highest and relatively remained constant at the mid-season stage (Figure 4). The Kc declined rapidly during the late season stage. Higher Kc values were recorded from 18 - 29 days after planting as compared to the values in the initial and late of the crop life cycle. The maximum Kc value was 0.86 at 12 days after planting for the reason that changed in Kc could be attributed to the seasonal variation of leaf size which is in line with the findings of Zhang *et al* (2005).

3.3 Performance evaluation comparison between ETc observed using Lysimeter and other three empirical models for water leaf crop.

Table 3, shows the observed and predicted waterleaf evapotranspiration at different stages of growth respectively. Similarly, Table 4.4 shows the model performance comparison, which resulted in very good agreement. Etc predicted using the three models selected and ETc observed from the field using lysimeter for the waterleaf crop exhibited a high degree of agreement.

Table 3: Performance evaluation comparison between crop evapotranspiration observed from (lysimeter) versus predicted from (BMN, BC and HG models) for waterleaf crop at different growth stages.

Stages of growth (DAP)	Lysimeter Method (mm/day)	Blaney–Morin Nigeria (BMN) (mm/day)	Blaney – Criddle (BC) (mm/day)	Hargreaves (HG) (mm/day)
Initial 17	3.65	5.25	4.16	4.76
Dev8-17	4.88	5.24	4.51	4.54
Mid 18-29	5.48	5.4	5.31	5.42
Late 30-36	5.34	5.96	5.4	5.14

Table 4: Performance evaluation comparison between ETc observed using Lysimeter and other three empirical models for three crops.

Models	RMSE	NSE	RSR	Performance Rating
Blaney-Morin Nigeria	3.12	0.68	0.51	Good
Blaney-Criddle	2.81	0.94	0.04	Very Good
Hargreaves	0.87	0.96	0.02	Very Good

The output of the validation revealed NSE values of (0.68, 0.94, and 0.96) and RSR values of (0.51, 0.04, and 0.02) for Blaney –Morin Nigeria, Blaney-Criddle and Hargreaves respectively, which indicated that their performance was very good for predicting evapotranspiration of water leaf in the region and performance output of the models were rated " Good, Very Good' and Very Good" for the corresponded BMN, BC and HG model respectively. Similarly, the observed and predicted water leaf evapotranspiration were also analyzed using z-test as shown in Table 5-7 which indicating that there was no significance difference between the predicted and observed crop evapotranspiration at ($P < 0.05$) since the value of z-cal is less than Z critical. Thus, the applicability of BMN, BC and HG models is a good representation of calculating evapotranspiration for semi-arid region with sandy loam in the study area.

Table 5: Calculated z-test for ETc Lysimeter and Blaney-Morin Nigeria (BMN) for four stages of growth

z-test	ETc Lysimeter	ET BMN
Mean	5.030119	5.475191
Variance	0.526241	0.33857
Stage of growth	4	
level of significance 5%		
z-cal	-0.76478	
Z critical two-tail	1.9634	

Table 6: Calculated z-test for ETc Lysimeter and Blaney-Criddle (BC) for four stages of growth

z-test	ETc Lysimeter	ETBC
Mean	5.030319	4.945594
Variance	0.526341	0.36157
Stage of growth	4	
level of significance 5%		
z-cal	0.140969	
Z critical two-tail	2.4732	

Table 7: Calculated z-test for ETc Lysimeter and Hargreaves (HG) for four stages of growth

z-test	ETc Lysimeter	ETHG
Mean	5.030319	4.855535
Variance	0.526351	0.631574
Stage of growth	4	
level of significance 5%		
z-cal	0.218876	
Z critical two-tail	1.32634	

4.0 CONCLUSION AND RECOMMENDATIONS

4.1 Conclusion

An experiment was conducted to determine the values of the growth parameters and crop evapotranspiration at stages of growth of waterleaf crop. The study was conducted at the research farm in Ramat Polytechnic, Maiduguri, Nigeria, from 16th February to 23rd March 2020. The observed crop evapotranspiration and predicted was analysed using Nash-Sutcliffe efficiency (NSE) and statistical analyses (z-test) as follows; Correlation analysis among the growth parameters showed that, there is strong positive relationship of about (82% to 90%). The crop evapotranspiration values of waterleaf in Maiduguri semi-arid climate and sandy loam soil is averagely 3.65, 4.88, 5.48 and 5.34 mm at each growth stage, respectively, with seasonal total ETc of 177.44 mm. The crop coefficient values of this crop for in region and soil is found to be 0.62, 0.82, 0.86 and 0.76 at each growth stage, respectively. The values of ETc determined from the lysimeter were validated by Blaney-Morin Nigeria (BMN), Blaney-Criddle (BC) and Hargreaves models, better agreement was recorded between the ETc calculate from empirical model for the waterleaf using Nash-Sutcliffe efficiency (NSE) and T-test soft wire. Therefore, the study revealed that drainage lysimeter can be said to be functional and efficient to use in the region.

4.2 Recommendations

The results from this study have shown that a locally made, well designed and developed simple drainage lysimeter can be used to generate ET data for waterleaf crop and other similar crops where standard climatic data measurements are not available. Therefore, the following recommendations are onward:

- (i) Since this experiment is season study in a single environment, further research over seasons are required so as to develop reliable values.
- (ii) The experiment should be repeated in similar agro-climatic condition in order to confirm the findings.
- (iii) Similar experiment are needed to be conducted at different agro-ecological zone of Nigeria.

REFERENCES

- Abebe, S. (2012). Determination of water requirement and crop coefficient for sorghum (sorghum bicolor L.) at melkassa, Ethiopia haramaya University Msc thesis pp 23-45
- Abhinaya, S. and José, L. (2015). Crop Evapotranspiration (ET) Estimation Models: A Review and Discussion of the Applicability and Limitations of ET Methods Journal of Agricultural Science Canadian Center of Science and Education 50; Vol. 7, No. 6; ISSN 1916-9752 E-ISSN 1916-9760
- Abirdew S., Mamo G., and Mengesha M. (2018). Determination of Crop Water Requirements for Maize in Abshege Woreda, Gurage Zone, Ethiopia, *Journal of Earth Science & Climatic Change* DOI: 10.4172/2157-7617pp23-34
- Adeniji, F.A (2002). Operation and maintenance in capacity Utilization for sustainable development in contemporary Nigeria. University of Maiduguri Faculty of Engineering Seminar Series, 2(1):1-15.
- Adeniran, S., Zickermann, J. and Kornahrens, M. (2010). Poultry manure effect on growth and yield of maize. *West African Journal of Applied Ecology*, 9: 1-11.
- Atia, A.A.M., K.A. Eldouby, M.M. Salem and A.M.S.A. Eltaweel, (2001). Factor analysis and other statistical techniques efficiencies for studying yield and yield components in maize (*Zea mays* L.). Conference of Sustainable Agricultural Development, Fayoum, Fac. Agric., cairo Univ., 46-53.
- Attarod P, Komori D, Hayashi K, and Aoki M (1997) Comparison of the evapotranspiration among a paddy field, cassava plantation and teak plantation in Thailand. 60: 789-792. *J Agric Meteorol*, 60:789–792.
- Babiker, E.A. (1999). Effect of Sowing Date and Plant Density on Growth and Yield of irrigated Maize (*Zea mays* L.) at Rahad (Sudan). *University of Khartoum Journal of Agricultural Sciences* 7(1), 1-19.
- Bashir, A.U., (2014). Response of Maize to Irrigation Scheduling Method under Drip Irrigation Method, unpublished paper pp 35-37.
- Bashir, M.A., T. Hata, A.W. Abdelhadi, H. Tanakamaru and A. Tada, (2006). Satellite-based evapotranspiration and crop coefficient for irrigated sorghum in the Gezira scheme, Sudan. *Journal of Hydrology and Earth System Sciences*, 3: 793 – 817.
- Bremer, 2003. Evaluation of lysimeters used in turf grass evapotranspiration studies using the dual-probe heat-pulse technique. *Agron. J.* 95:1625–1632.
- Brown G, (2002). Collecting and testing barrel sized undisturbed soil monoliths. *Soil Sc. A.m. J.* 49: 1067-1069.
- Burment B.J Kodai, S., Ilbeyi, A., Ustun, H., (1983). Determination of Evapotranspiration and basal crop coefficient of alfalfa with lysimeter. *Agric water management*, 81: 358-370.

- Chiroma, A. M. (2004). Effects of land configuration and wood-shavings mulch on soil properties, yield and water use of sorghum. Unpublished Ph.D. Thesis, University of Maiduguri.23 (8-90:232-34)
- Chiroma, A. M., Alhassan, A. B. and Bababe, B. (2005). Physical properties of a sandy loam soil in northeastern Nigeria as affected by tillage and stubble management. *Nigerian Journal of Tropical Agriculture*, 6:115-121.
- Dalhart, M (2005) Lysimeter design, construction, and instrumentation or assessing evaporation from a large undisturbed soil monolith. *ApplEng Agric*, 14:303–308.
- Dalorima L (2002) Effects of Different organic matters on the Growth Performance of Amaranthus in Maiduguri International Research Journal of Agricultural Science and Soil Science, 3(6):240-339.
- De Rouw, A. and J.L. Rajot, (2004): Soil organic matter, surface crusting and erosion in Sahelian agricultural systems based on manuring and fallowing. *Agric. Ecosyst. Environ.* 104:263–276.
- Dibal, J.M (2002). Desertification in Nigeria. Causes, effect and review of control measures. University of Maiduguri, Faculty of Engineering seminar series, 2(1):59-74.
- Dibal,J.M., Dauda, A. and Umara, B. (2006). Irrigation and society. A review, University of Maiduguri Faculty of Engineering Seminar Series, 4(1): 52-61.
- Ejieji, C. J. (2011). Performance of Three Empirical Reference Evapotranspiration Models under Three Sky Conditions using two Solar Radiation Estimation Methods at Ilorin, Nigeria. *Agricultural Engineering International: CIGR Journal*. Manuscript No. 1673. Vol.13(3). Pp1-21.
- El-Badawy, M and .El.M., (2006). The relative contribution of yield components by using specific statistical techniques in corn. *Annals of Agric. Sci., Moshtohor*, 44(3): 899-909.
- Ezeaku, P. I. (2004). Estimation of crop Water Requirement from Climate and Soil Data for Maize Production in Two SE Nigeria locations, a paper presented at the Annual Conference of the Soil Science society of Nigeria pp 11-23.
- Fangguo Zhang. (2005). Cryptanalysis of chang et al.'s signature scheme with message recovery. *IEEE Communications Letters*, 9(4), 358–359. <https://doi.org/10.1109/lcomm.2005.1413633>
- FAO (1995). *Production Yearbook Vol. 49*. Food and Agriculture Organization, United Nations, Rome, Italy.
- FAO (2006). World reference base for soil resources 2006. By: IUSS working group. *World Soil Resources Reports* 103. Rome, Italy.
- FAO (2010).Soil Biota and Biodiversity” The “Root” of Sustainable Development” <ftp.fao.org/010/i0112e07.pdf>, February, 2010.
- FAO 2002. Crop Water Requirements and Irrigation Scheduling. Developed by: A.P. Savva and K. Frenken. FAO Irrigation Manual Module 4. Harare, Zimbabwe.
- FAO, (1998). Agriculture, Food and Nutrient for Africa: A Resource Book for cooperate Document repository, 2: pp. 145- 175.
- FAO, 2000. Crop evapotranspiration – Guidelines for computing crop water requirements, By: R. Allen, L. Pereira, D. Raes, M. Smith, Irrigation and drainage paper 56.
- FAO, United Nations, 2001, Expert consultation Italy, on revision of FAO methodologies, 28-31 May for crop water requirements, Annex V. Rome.

- Foieldl, N., and Paul, R. (2001). *Moringaoleifera*. In: The Encyclopedia of fruit and nuts (pp 509 – 512). CABI, Oxfordshire, UK:
- Gomez KA, and Gomez AA (1984). Statistical Procedures for Agricultural Research. 2nd edition. John Wiley and Sons Inc., New York. pp 75-165.
- Govinda, B. (2012). Estimation of Potential Evapotranspiration and Crop Coefficient of Maize at Rupandehi District of Nepal. *International Journal of Agricultural Management & Development (IJAMAD)* Available online on: www.ijamad.com ISSN: 2159-5852 (Print) ISSN: 2 159-5860 pp1-4.
- Howell, T.A., 2001. Enhancing water use efficiency in irrigated agriculture. *Journal of Agronomy*, 93:281-289.
- ICRISAT, 2008. Concepts and Techniques for Breeding Hybrid Sorghum, Maize and Pearl Millet. Proceedings of the West African Training Workshop on Hybrid Sorghum and Pearl Millet Breeding.
- Igbadum, H.E., Tarimo, A.K., Salim, B.A and Mahoo, H. F (2007). Evaluation of selected crop water production functions for an irrigated maize crop. *Agric. water manage*, 94:1-10.
- Jensen, M.E., (1990). Water Consumption by Agricultural Plants. In: Kozlowski, T.T. (Ed.), *Water Deficits and Plant Growth: II*. Academic Press, Inc., New York, NY, Pp. 1–22.
- Jensen, M.E., Burman, R.D., and Allen, R.G., (1990). *Evapotranspiration and irrigation water requirements*, ASCE Manuals and Reports on Engineering Practice No.70. ASCE, New York, NY.
- Johnson, M.A, 2000. Grain Millet Production Handbook. Kansas State University, Manhattan, Kansas. Pp. 1 – 32.
- Jones, H.G. (2004). Irrigation scheduling: advantages and pitfalls of plant based methods. *Journal of Experimental Botany*, 55:2427-2436,
- Kang, S., B. Gu, T. Du and J. Zhang, (2008). Crop coefficient and ratio of transpiration to evapotranspiration of winter wheat and maize in a semi humid region. *Chinese Journal of Agricultural Water Management*, 59: 245-251.
- Katerji, N., Mastrorilli, M., van Hoorn, J.W., Lahmer, F.Z., Hamdy, A., and Oweis, T., (2009). Durum wheat and barley productivity in saline–drought environments. *European Journal of Agronomy*. 31, 1-9.
- Koe J, Piccinni G, Marek T, and Howell T (2009). Determination of growth-stage-specific crop coefficients (Kc) of cotton and wheat. *Agric. Water Manage*. 96:1691-1697. <http://dx.doi.org/10.1016/j.agwat.2009.06.023>
- Koy J, Toyin R, Miguel, Oguntunde, Philip G, and Ayodele E (2014). Greenhouse evapotranspiration and crop factor of *Amaranthuscruentus* grown in weighing lysimeters. *African Journal of Agricultural Research* Vol. 10(34), pp. 3453-3461, 20.
- Kwanbe F, Eze, T and Jone G (2015) Modification of the Penman method for computing bare soil evaporation, *Hydrol. Process*. 21, 3627–3634.
- Kyari Z., Dalorima L.T, Bunu A., and Mohammed T. (2014) Effects of Different Mulching Materials on the Growth Performance of Okra in Maiduguri International Research *Journal of Agricultural Science and Soil Science*, 4(8):145-149.
- Michael, A. M (1999). *Irrigation theory and practice*, Reprint Vikas publishing House PVT Ltd New India 4(3): 520.
- Michael, A.M (2008). *Irrigation theory and practice*, second edition Vilas publishing House, New Delhi, India pp.810.

- Mohammed, M.A. (2006). Weeds in Maize (*Zea mays* L.) and Millet (Pearl) (Importance and Control) with Special Reference to the Northern State of Sudan. Ph.D. (Agric.) thesis. Sudan University of Science and Technology, Khartoum, Sudan. Pp234-245.
- Mohawesh, J C, (2011) Comparison of different methods for estimating reference evapotranspiration (ET_o) in North Fluminense RJ region. *Brazilian Journal of Agricultural and Environmental Engineering. Portuguese*; 7(2):275- 279.
- Mohsan Y. C., Singh D. K. and Rao N.V. (2002). Path coefficient analysis for oil and grain yield in maize (*Zea mays* L.) genotypes. *Nat. J. Pl. Impr.* 4(1): 75-77.
- Moriasi, D.N., Arnold J., Van Liew M.W., Bingner R.L., Harmel R.D., and Veith T.L. (2007): Model evaluation guidelines for systematic quantification of accuracy in watershed simulations. *Transactions of the ASABE*, 50: 885–900.
- Nathan, T. (2002). Le phasme et la brindille. *Pardès*, 32–33(1), 197. <https://doi.org/10.3917/parde.032.0197>
- Nukenine, E.N (2010). Stored product production in Africa, past present and future. 10th International conference in Stored Product Production, pp. 26-30 doi; 10:5073 JKA pp. 425- 177.
- Obilana A. B (2007) overview: Importance of millets in Africa ICRISAT, Nairobi, Kenya, pp. 36-45.
- Obioma, C. P., Nwaigwe K. N., and Okereke C. D. (2010) Development and Evaluation of a Weighable lysimeter to Determine crop Evapotranspiration *International Journal of Research in Engineering and Technology* eISSN: 2319-1163 | pISSN: 2321-7308.
- Palada MC (2000). *Moringaa* versatile Tree Crop with Horticultural Potential in the Subtropical United State. *Horts. Sci.* 31(5).
- Patil, S.L., Sheelavantar, M.N. and Lamani, V.K. 2009. Correlation Analysis among Growth and Yield Components of Winter Sorghum. *I S M N*, 44: 14-17.
- Rashid N.A, Majnooni-Heris A., ZareHaghi D., and Mahtabi GH (2013). Evaluate several potential evapotranspiration methods for regional use in Tabriz, Iran. *J. Appl. Environ. Biol. Sci.*; 3(6):31-41.